

Wall-mount Indicators

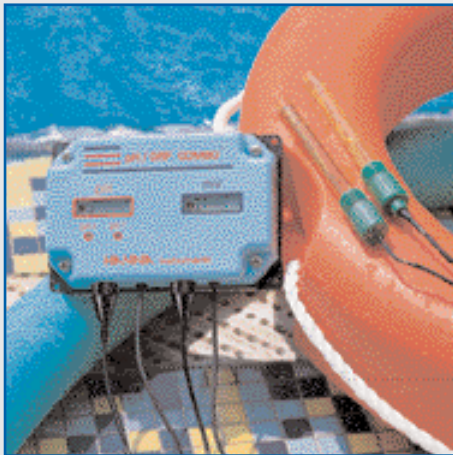


Table of Contents	Page
Comparison Chart	C2
Introduction	C3
pH Indicators	C4
EC/TDS Indicators	C8
Combination Indicators	C12
ORP Indicators	C14
Temperature Indicator	C16

Comparison Chart

Part code	Range	Accuracy	Probe	Calibration	Page
pH Indicators					
HI 981401N	0.0 to 14.0 pH	±0.2 pH	HI 1286 + HI 1283	2 point	C 4
HI 991401	0.0 to 14.0 pH	±0.1 pH	HI 1293D	2 point	C 5
	0.0 to 60.0°C / 32.0 to 140.0°F	±0.5°C / ±1°F	HI 1294	-	
HI 981402	0.0 to 14.0 pH	±0.2 pH	HI 1286	2 point	C 6
HI 981400	0.0 to 14.0 pH	±0.2 pH	FC 200B	2 point	C 7
TDS (Total Dissolved Solids) Indicators					
HI 983301N	0 to 1990 ppm	±2% F.S.	HI 7634	1 point	C 8
HI 983301N/5	0 to 1990 ppm	±2% F.S.	HI 7634	1 point	C 8
HI 983306	0 to 1990 ppm	±2% F.S.	HI 7634/2	1 point	C 10
HI 983308	0.00 to 9.99 ppt	±2% F.S.	HI 7632/2	1 point	C 10
Conductivity (EC) Indicators					
HI 983302N	0.00 to 9.99 mS/cm	±2% F.S.	HI 7632	1 point	C 8
HI 983303	0 to 1990 µS/cm	±2% F.S.	HI 7634/2	1 point	C 10
HI 983307	0.00 to 9.99 mS/cm	±2% F.S.	HI 7632/2	1 point	C 10
HI 983304	0.00 to 19.99 µS/cm	±2% F.S.	HI 7631/2	1 point	C 11
ORP Indicator					
HI 982401	-999 to 999 mV	±5 mV	HI 3214P/2	-	C 14
Temperature Indicators					
HI 146-00	-50.0 to 150.0°C	±0.3°C	-	-	C 16
HI 146-01	-58.0 to 302.0°F	±0.5°F	-	-	C 16
HI 146-99	-50.0 to 150.0°C	±0.3°C	-	-	C 16
Multiparameter Indicators					
HI 993301	EC: 0 to 3999 µS/cm	±2% F.S.	HI 7630	1 point	C 9
	TDS: 0 to 2000 ppm	±2% F.S.	HI 7630	1 point	
	T: 0.0 to 60.0°C / 32.0 to 140.0°F	±0.5°C / ±1°F	HI 7630	-	
HI 993302	EC: 0.00 to 20.00 mS/cm	±2% F.S.	HI 7630	1 point	C 9
	TDS: 0.00 to 10.00 ppt	±2% F.S.	HI 7630	1 point	
	T: 0.0 to 60.0°C / 32.0 to 140.0°F	±0.5°C / ±1°F	HI 7630	-	
HI 981404N	pH: 0.0 to 14.0 pH	±0.2 pH	HI 1286 + HI 1283	2 point	C 12
	TDS: 0 to 1990 ppm	±2% F.S.	HI 7634	1 point	
HI 981405N	pH: 0.0 to 14.0 pH	±0.2 pH	HI 1286 + HI 1283	2 point	C 12
	EC: 0.00 to 9.99 mS/cm	±2% F.S.	HI 7632	1 point	
HI 991404	pH: 0.0 to 14.0 pH	±0.1 pH	HI 1293D	2 point	C 13
	EC: 0 to 3999 µS/cm	±2% F.S.	HI 7630	1 point	
	TDS: 0 to 2000 ppm	±2% F.S.	HI 7630	1 point	
	T: 0.0 to 60.0°C / 32.0 to 140.0°F	±0.5°C / ±1°F	HI 7630	-	
HI 991405	pH: 0.0 to 14.0 pH	±0.1 pH	HI 1293D	2 point	C 13
	EC: 0.00 to 20.00 mS/cm	±2% F.S.	HI 7630	1 point	
	TDS: 0.00 to 10.00 ppt	±2% F.S.	HI 7630	1 point	
	T: 0.0 to 60.0°C / 32.0 to 140.0°F	±0.5°C / ±1°F	HI 7630	-	
HI 981406	pH: 0.0 to 14.0 pH	±0.2 pH	HI 2114P/2 + HI 1283	2 point	C 15
	mV: -999 to 999 mV	±5 mV	HI 3214P/2 + HI 1283	-	





Wall-Mount Indicators

Simple-to-use Indicators for Continuous Monitoring

Hanna's wall-mount indicators are an ideal economical solution in applications where constant monitoring of a stationary sample is required. The following section contains indicators to monitor pH, ORP, TDS, Conductivity and Temperature. This versatile range of indicators allows the user to choose the probe that best fits their application (See section E for a complete range of electrodes). Selected instruments offered in this line also provide visual alarms so the user can easily recognize if the monitored solution is out of specification for the application.

Hanna's wall-mount indicators are very easy to install and use. They are powered with a 12 V power supply and provide very accurate results. Many models feature an interchangeable probe so that if an application requires a particular probe it can simply be plugged into the meter. Other features of these instruments include backlit LCD, manual or automatic calibration, water-tight casings, large and easy-to-read displays, calibration check feature for the thermometers, visual alarms and multi-parameter models that allow the user to monitor up to three different parameters with one indicator.

